WINDOWS 2020
BUILT FOR THE TRADE

COMMERCIAL OFFER

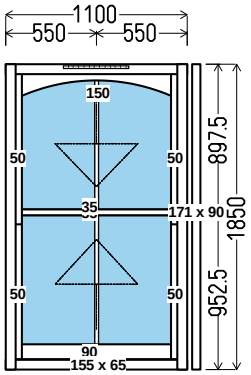

View from the outside

W1/W2 (2pcs)

1. Type: 155 slim sash spring/seal, 55mm horns on top sash
2. Wood: Glued finger joint pine, hardwood (sapele) sill
3. Painting (TEKNOS water based 4-layers coating system): White paint RAL9010
4. Glass: 4mm Low Energy Clear Glass (4-16Ar-4LowE), Ug=1.1 (warm frame TGI grey RAL 7035)
5. Hardware: spring balances
   * Secure Stop - Pol. Chrome - 2 pcs
   * Solid Sash Lift 50x19mm Pol. Chrome
   * Fitch Fastener Locking Pol. Chrome SBD
6. Sash sealing: Two seals
7. Decorative glazing bars: 23mm timber glazing bars with spacers inside glass
8. Ventilation: Trickle vent XR16 4600EA white (not visible from the outside)
9. Internal window board not included
10. Bay corner profile (sapele) 171x90, 1850mm x 2pcs Not attached to the frame
11. 104 kg.
12. Uw <= 1.44.

		Quantity
1100x1850mm	2.04m²	**2**

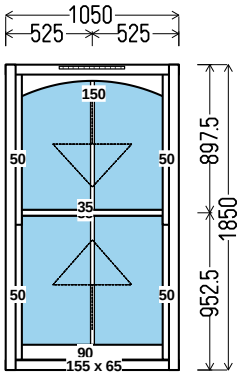

View from the outside

W1/W2. (2pcs)

1. Type: 155 slim sash spring/seal, 55mm horns on top sash
2. Wood: Glued finger joint pine, hardwood (sapele) sill
3. Painting (TEKNOS water based 4-layers coating system): White paint RAL9010
4. Glass: 4mm Low Energy Clear Glass (4-16Ar-4LowE), Ug=1.1 (warm frame TGI grey RAL 7035)
5. Hardware: spring balances
   * Secure Stop - Pol. Chrome - 2 pcs
   * Solid Sash Lift 50x19mm Pol. Chrome
   * Fitch Fastener Locking Pol. Chrome SBD
6. Sash sealing: Two seals
7. Decorative glazing bars: 23mm timber glazing bars with spacers inside glass
8. Ventilation: Trickle vent XR16 4600EA white (not visible from the outside)
9. Internal window board not included
10. 78 kg.
11. Uw <= 1.45.

		Quantity
1050x1850mm	1.94m²	**2**

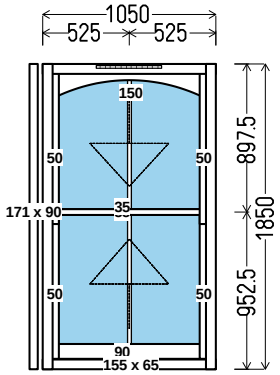

View from the outside

W1/W2,, (2pcs)

1. Type: 155 slim sash spring/seal, 55mm horns on top sash
2. Wood: Glued finger joint pine, hardwood (sapele) sill
3. Painting (TEKNOS water based 4-layers coating system): White paint RAL9010
4. Glass: 4mm Low Energy Clear Glass (4-16Ar-4LowE), Ug=1.1 (warm frame TGI grey RAL 7035)
5. Hardware: spring balances
   * Secure Stop - Pol. Chrome - 2 pcs
   * Solid Sash Lift 50x19mm Pol. Chrome
   * Fitch Fastener Locking Pol. Chrome SBD
6. Sash sealing: Two seals
7. Decorative glazing bars: 23mm timber glazing bars with spacers inside glass
8. Ventilation: Trickle vent XR16 4600EA white (not visible from the outside)
9. Internal window board not included
10. Bay corner profile (sapele) 171x90, 1850mm x 2pcs Not attached to the frame
11. 101 kg.
12. Uw <= 1.45.

		Quantity
1050x1850mm	1.94m²	**2**

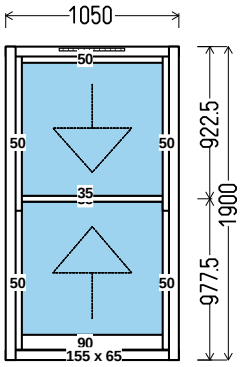

View from the outside

W3 (1pcs)

1. Type: 155 slim sash spring/seal, 55mm horns on top sash
2. Wood: Glued finger joint pine, hardwood (sapele) sill
3. Painting (TEKNOS water based 4-layers coating system): White paint RAL9010
4. Glass: 4mm Low Energy Clear Glass (4-16Ar-4LowE), Ug=1.1 (warm frame TGI grey RAL 7035)
5. Hardware: spring balances
   * Secure Stop - Pol. Chrome - 2 pcs
   * Solid Sash Lift 50x19mm Pol. Chrome
   * Fitch Fastener Locking Pol. Chrome SBD
6. Sash sealing: Two seals
7. Decorative glazing bars: 23mm timber glazing bars with spacers inside
8. Ventilation: Trickle vent XR16 4600EA white (not visible from the outside)
9. Internal window board not included
10. 75 kg.
11. Uw <= 1.44.

		Quantity
1050x1900mm	2.00m²	**1**



View from the outside

W4 (1pcs)

1. Type: 155 slim sash spring/seal, 55mm horns on top sash
2. Wood: Glued finger joint pine, hardwood (sapele) sill
3. Painting (TEKNOS water based 4-layers coating system): White paint RAL9010
4. Glass: 4mm Low Energy Clear Glass (4-16Ar-4LowE), Ug=1.1 (warm frame TGI grey RAL 7035)
5. Hardware: spring balances
   * Secure Stop - Pol. Chrome - 2 pcs
   * Solid Sash Lift 50x19mm Pol. Chrome
   * Fitch Fastener Locking Pol. Chrome SBD
6. Sash sealing: Two seals
7. Decorative glazing bars: 23mm timber glazing bars with spacers inside
8. Ventilation: Trickle vent XR16 4600EA white (not visible from the outside)
9. Internal window board not included
10. 78 kg.
11. Uw <= 1.43.

		Quantity
1200x1750mm	2.10m²	**1**



View from the outside

W5/W7 (2pcs)

1. Type: 155 slim sash spring/seal
2. Wood: Glued finger joint pine, hardwood (sapele) sill
3. Painting (TEKNOS water based 4-layers coating system): White paint RAL9010
4. Glass: 4mm Low Energy Clear Glass (4-16Ar-4LowE), Ug=1.1 (warm frame TGI grey RAL 7035)
5. Hardware: spring balances
   * Secure Stop - Pol. Chrome - 2 pcs
   * Solid Sash Lift 50x19mm Pol. Chrome
   * Fitch Fastener Locking Pol. Chrome SBD
6. Sash sealing: Two seals
7. Decorative glazing bars: 23mm timber glazing bars with spacers inside glass
8. Ventilation: Trickle vent XR16 4600EA white (not visible from the outside)
9. Internal window board not included
10. Bay corner profile (sapele) 171x90, 1150mm x 2pcs Not attached to the frame
11. 69 kg.
12. Uw <= 1.52.

		Quantity
1100x1150mm	1.26m²	**2**



View from the outside

W5/W7 (2pcs)

1. Type: 155 slim sash spring/seal
2. Wood: Glued finger joint pine, hardwood (sapele) sill
3. Painting (TEKNOS water based 4-layers coating system): White paint RAL9010
4. Glass: 4mm Low Energy Clear Glass (4-16Ar-4LowE), Ug=1.1 (warm frame TGI grey RAL 7035)
5. Hardware: spring balances
   * Secure Stop - Pol. Chrome - 2 pcs
   * Solid Sash Lift 50x19mm Pol. Chrome
   * Fitch Fastener Locking Pol. Chrome SBD
6. Sash sealing: Two seals
7. Decorative glazing bars: 23mm timber glazing bars with spacers inside glass
8. Ventilation: Trickle vent XR16 4600EA white (not visible from the outside)
9. Internal window board not included
10. 52 kg.
11. Uw <= 1.53.

		Quantity
1050x1150mm	1.21m²	**2**



View from the outside

W5/W7 (2pcs)

1. Type: 155 slim sash spring/seal
2. Wood: Glued finger joint pine, hardwood (sapele) sill
3. Painting (TEKNOS water based 4-layers coating system): White paint RAL9010
4. Glass: 4mm Low Energy Clear Glass (4-16Ar-4LowE), Ug=1.1 (warm frame TGI grey RAL 7035)
5. Hardware: spring balances
   * Secure Stop - Pol. Chrome - 2 pcs
   * Solid Sash Lift 50x19mm Pol. Chrome
   * Fitch Fastener Locking Pol. Chrome SBD
6. Sash sealing: Two seals
7. Decorative glazing bars: 23mm timber glazing bars with spacers inside glass
8. Ventilation: Trickle vent XR16 4600EA white (not visible from the outside)
9. Internal window board not included
10. Bay corner profile (sapele) 171x90, 1150mm x 2pcs Not attached to the frame
11. 67 kg.
12. Uw <= 1.53.

		Quantity
1050x1150mm	1.21m²	**2**



View from the outside

W6 (1pcs)

1. Type: 155 slim sash spring/seal
2. Wood: Glued finger joint pine, hardwood (sapele) sill
3. Painting (TEKNOS water based 4-layers coating system): White paint RAL9010
4. Glass: 4mm Low Energy Clear Glass (4-16Ar-4LowE), Ug=1.1 (warm frame TGI grey RAL 7035)
5. Hardware: spring balances
   * Secure Stop - Pol. Chrome - 2 pcs
   * Solid Sash Lift 50x19mm Pol. Chrome
   * Fitch Fastener Locking Pol. Chrome SBD
6. Sash sealing: Two seals
7. Decorative glazing bars: 23mm timber glazing bars with spacers inside glass
8. Ventilation: Trickle vent XR16 4600EA white (not visible from the outside)
9. Internal window board not included
10. 47 kg.
11. Uw <= 1.55.

		Quantity
950x1100mm	1.04m²	**1**



View from the outside

W8 (1pcs)

1. Type: 155 slim sash spring/seal, 55mm horns on top sash
2. Wood: Glued finger joint pine, hardwood (sapele) sill
3. Painting (TEKNOS water based 4-layers coating system): White paint RAL9010
4. Glass: 4mm Low Energy Clear Glass (4-16Ar-4LowE), Ug=1.1 (warm frame TGI grey RAL 7035)
5. Hardware: spring balances
   * Secure Stop - Pol. Chrome - 2 pcs
   * Solid Sash Lift 50x19mm Pol. Chrome
   * Fitch Fastener Locking Pol. Chrome SBD
6. Sash sealing: Two seals
7. Decorative glazing bars: 23mm timber glazing bars with spacers inside
8. Ventilation: Trickle vent XR16 4600EA white (not visible from the outside)
9. Internal window board not included
10. 51 kg.
11. Uw <= 1.55.

		Quantity
1150x1000mm	1.15m²	**1**



View from the outside

W9 (1pcs)

1. Type: 155 slim sash spring/seal, 55mm horns on top sash
2. Wood: Glued finger joint pine, hardwood (sapele) sill
3. Painting (TEKNOS water based 4-layers coating system): White paint RAL9010
4. Glass: 4mm Low Energy Clear Glass (4-16Ar-4LowE), Ug=1.1 (warm frame TGI grey RAL 7035)
5. Hardware: spring balances
   * Secure Stop - Pol. Chrome - 2 pcs
   * Solid Sash Lift 50x19mm Pol. Chrome
   * Fitch Fastener Locking Pol. Chrome SBD
6. Sash sealing: Two seals
7. Decorative glazing bars: 23mm timber glazing bars with spacers inside
8. Ventilation: Trickle vent XR16 4600EA white (not visible from the outside)
9. Internal window board not included
10. 58 kg.
11. Uw <= 1.50.

		Quantity
850x1650mm	1.40m²	**1**



View from the outside

W10 (1pcs)

1. Type: 155 slim sash spring/seal, 55mm horns on top sash
2. Wood: Glued finger joint pine, hardwood (sapele) sill
3. Painting (TEKNOS water based 4-layers coating system): White paint RAL9010
4. Glass: 4mm Low Energy Clear Glass (4-16Ar-4LowE), Ug=1.1 (warm frame TGI grey RAL 7035)
5. Hardware: spring balances
   * Secure Stop - Pol. Chrome - 2 pcs
   * Solid Sash Lift 50x19mm Pol. Chrome
   * Fitch Fastener Locking Pol. Chrome SBD
6. Sash sealing: Two seals
7. Decorative glazing bars: 23mm timber glazing bars with spacers inside
8. Ventilation: Trickle vent XR16 4600EA white (not visible from the outside)
9. Internal window board not included
10. 55 kg.
11. Uw <= 1.54.

		Quantity
1200x1050mm	1.26m²	**1**